


Stain masking paint

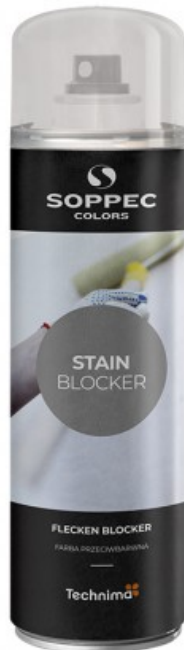

Product codes:

Reference: 470001

EAN13: -

UPC: -

Product attributes:

Volume: 500 ml

Color (on demand) - delivery time: 3 to 4 weeks: White

Product features:

Product Type: Industrial paints

Volume: 500 ml

Packaging: Box of 12 aerosols

Brand: SOPPEC

Product short description:

A purpose-designed paint to mask stains such as: grease marks, water stains, solvent residues, tar or glue marks. Dries quickly to a matt white finish. Can be applied to walls, ceilings, concrete, plaster, etc. Usable both inside and out-of-doors. Suitable as a primer before painting walls or ceilings. Can be applied before a coat of cement paint.

Product description:

Properties of the Stain masking paint

- Excellent adhesion
- High scratch and impact resistance
- UV-resistant and does not yellow over time
- Rapid drying
- Matt satin finish
- Touch dry after 10 minutes
- Completely dry after 20 minutes

(Figures given for information only, actual times will depend on the temperature, paint thickness, humidity etc)

Specifications of the Stain masking paint

Composition

Binder: acrylate copolymers

Solvents: blend of solvents

Propellant: dimethyl ether

Health and safety

CLP labelling with two pictograms.

DANGER

H222 Extremely flammable aerosol.

H229 Pressurised container: May burst if heated.

H319 Causes serious eye irritation.

H336 May cause drowsiness or dizziness.

Instructions for use

The surface must be clean, dry and free of grease. Remove all residual paint, varnish, rust, etc, then sand. When using out-of-doors, remove any moss or algae present on the surface. Cover the surrounding areas. Spray at a distance of approximately 25 to 30 centimetres from the surface. Leave to dry for 30 minutes between coats if applying several thin layers.

Safety Data Sheet

GET THE SAFETY DATASHEET